

## Overrunning Ball Bearing Supported, Sprag Clutch Couplings

### FW Series



#### For in-line shaft applications

**Outer race overrunning—  
 intermediate speed**

**Inner race overrunning—  
 high speed**

FW clutch couplings are comprised of an FSO clutch with a disc coupling. The Model FSO clutch can not accommodate any misalignment, so a coupling is always required for shaft to shaft in-line mounting. The FW clutch couplings are designed for high speed inner race overrunning and

intermediate speed outer race overrunning. They are usually selected for inner race overrunning. Where outer race overrunning is necessary, use the AL..KMSD2 clutch coupling.

FW clutch couplings accommodate angular and parallel misalignment, are torsionally stiff and can couple shafts of different sizes.



Increased clutch-coupling speeds are possible with FSO clutches having steel labyrinth grease seals.

C/T is ideal for applications with high speed outer race overrunning and slow drive speed.

Models 403 through 712 are equipped with PCE sprags and are shipped from the factory with Mobil DTE Heavy Medium Oil.

FW-752 through 1018 clutches are shipped from the factory with Fiske Bothers Lubriplate Low-Temp Grease.

### Typical Applications

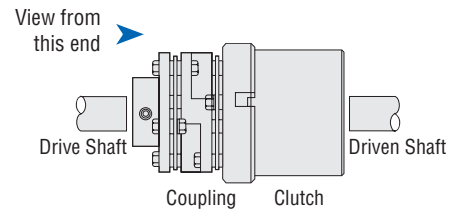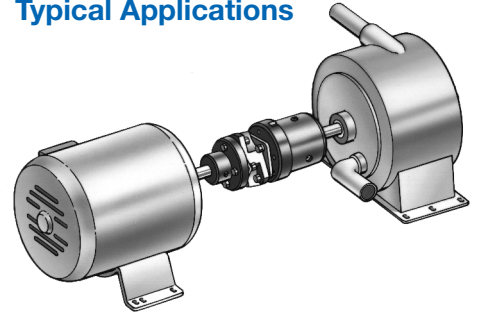

The FW Series clutch coupling is designed for **inner race overrunning**. Mount the clutch half of the unit on the driven shaft.

### FWW Series



#### For in-line shaft applications requiring low torque

FWW clutch couplings are designed for applications where the torque requirement is low in comparison to the shaft diameters. Both bore diameters in coupling hubs are larger than clutch bores in FW and FWW series.

C/T sprags are available in FWW series.

Increased clutch-coupling speeds are possible with FSO clutches having steel labyrinth seals.


Check key and shaft stress before making final clutch or coupling selection since this may determine maximum allowable drive torque capacity.

FWW-420 through 745 clutches are shipped from the factory with Mobil DTE Heavy Medium oil.


FWW-755 clutches are shipped from the factory with Fiske Bothers Lubriplate Low-Temp Grease.

The FWW Series clutch coupling is designed for **inner race overrunning**. Mount the drive coupling on the drive shaft and the driven coupling on the driven shaft.


**Note:** Mounting is reversed for C/T Series.

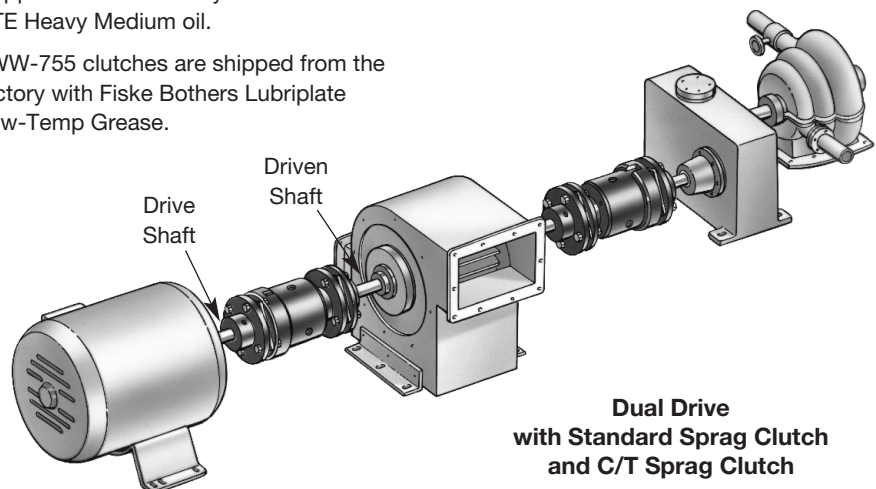

**Turning Gear Drive with C/T Sprag Clutch**

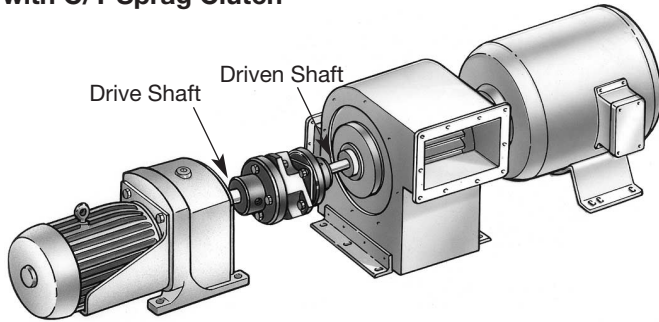


**With C/T Sprags**

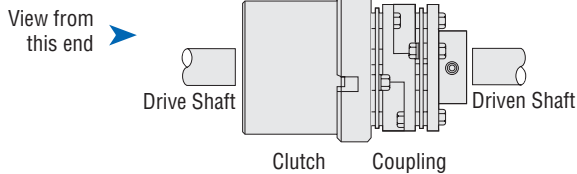


The model FW (C/T) clutch coupling is designed for outer race overrunning. Mount the clutch half of the unit on the drive shaft.

**FWW**

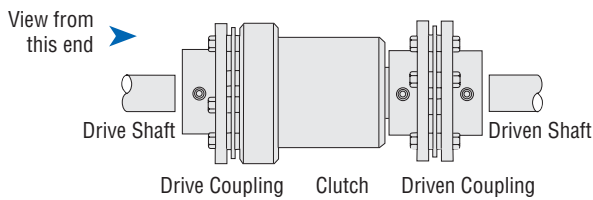

The model FWW clutch coupling is designed for inner race overrunning. Mount the drive coupling on the drive shaft and the driven coupling on the driven shaft.

**With C/T Sprags**

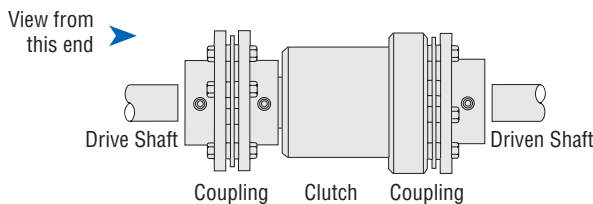

**Note:** Mounting is reversed for C/T Series.

**Bore and keyseat tolerances for couplings**

Couplings will be bored to AGMA Standard 511.02 for Flexible Couplings. Bore fit normally supplied is listed to the right.

*For tolerances not listed, please consult Formsprag.*

**Standard bore tolerances inches (mm)**

Nominal Shaft Dia.	Clearance Fit Class 1 Nominal	Interference* Fit Nominal
1/2" through 1 1/2" (12.7 through 38.1)	+ .001 / - .000 (+ .025 / - .000)	Less .001 + .0005 / - .000 (Less .025 + .013 / - .000)
Over 1 1/2" through 2" (Over 38.1 through 50.8)	+ .001 / - .000 (+ .025 / - .000)	Less .002 + .001 / - .000 (Less .051 + .025 / - .000)
Over 2" through 3" (Over 50.8 through 76.2)	+ .0015 / - .000 (+ .038 / - .000)	Less .003 + .0015 / - .000" (Less .076 + .038 / - .000)
Over 3" through 4" (Over 76.2 through 101.6)	+ .0015 / - .000 (+ .038 / - .000)	Less .003 + .0015 / - .000" (Less .076 + .038 / - .000)
Over 4" through 7" (Over 101.6 through 177.8)	+ .002 / - .000 (+ .051 / - .000)	Less .003 + .0015 / - .000" (Less .076 + .038 / .000)

\* Available at extra charge. Sizes are standard unless otherwise specified.

**Standard keyseats inches (mm)**

Nominal Shaft Diameter		Keyseat	
Over	Through	Width + .002 / - .000 (+ .051 / - .00)	Length + .010 / - .000 (+ .254 / - .000)
3/8 (9.525)	7/16 (11.100)	3/32 (2.362)	1/16 (1.168)
7/16 (11.100)	9/16 (14.275)	1/8 (3.175)	1/16 (1.575)
9/16 (14.275)	7/8 (22.225)	3/16 (4.750)	3/32 (2.362)
7/8 (22.225)	1 1/4 (31.750)	1/4 (6.350)	1/8 (3.175)
1 1/4 (31.750)	1 3/8 (34.925)	5/16 (7.925)	5/32 (3.962)
1 3/8 (34.925)	1 3/4 (44.450)	3/8 (9.525)	3/16 (4.750)
1 3/4 (44.450)	2 1/4 (57.150)	1/2 (12.700)	1/4 (6.350)
2 1/4 (57.150)	2 3/4 (69.850)	5/8 (15.875)	5/16 (7.925)
2 3/4 (69.850)	3 1/4 (82.550)	3/4 (19.050)	3/8 (9.525)
3 1/4 (82.550)	3 3/4 (95.250)	7/8 (22.225)	7/16 (11.100)
3 3/4 (95.250)	4 1/2 (114.300)	1 (25.400)	1/2 (12.700)
4 1/2 (114.300)	5 1/2 (139.700)	1 1/4 (31.750)	5/8 (15.875)
5 1/2 (139.700)	7 (177.800)	1 1/2 (38.100)	3/4 (19.050)



## FW

### Specifications

FW Size	Torque Capacity lb.ft. (Nm)	HP Rating/ 100 RPM HP (kw)	Maximum Overrunning Speed (RPM)								Clutch Size*	Coupling Size	Shipping Weight lb. (kg)
			Standard Sprag			C/T Sprag							
			Outer Race	Inner <sup>†</sup> Race	Drive Speed	Outer Race	Inner Race	Sprag Lift-off	Drive Speed				
403	107 (145)	2.0 (.90)	850	2,800	6,000	5,000	2,800	1,300	1,100	FSO-400	C403	11 (5)	
406	277 (375)	3.5 (2.6)	850	2,800	6,000	5,000	2,800	1,300	1,100	FSO-400	C406	13 (6)	
504	277 (375)	3.5 (2.6)	800	2,500	6,000	4,000	2,500	1,200	1,000	FSO-500	C504	19 (9)	
508	885 (1200)	11.0 (8.2)	800	2,500	5,000	4,000	2,500	1,200	1,000	FSO-500	C508	29 (13)	
607	900 (1220)	6.2 (4.6)	750	2,200	5,000	3,600	2,200	1,200	1,000	FSO-600	C607	31 (14)	
610	2,250 (3060)	29.0 (21.6)	750	2,200	3,750	3,600	2,200	1,200	1,000	FSO-600	C610	54 (25)	
708	2,066 (2800)	18.0 (13.4)	450	1,600	3,000	2,500	1,600	1,000	800	FSO-700	C708	68 (31)	
712	5,000 (6800)	48.0 (35.8)	450	1,600	3,000	2,500	1,600	1,000	800	FSO-700	C712	86 (30)	
752	5,166 (7000)	48.0 (35.8)	650	1,000	3,000	1,800	1,000	800	650	FSO-750	C752	127 (58)	
754	7,000 (9520)	90.0 (67.1)	650	1,000	2,800	1,800	1,000	800	650	FSO-750	C754	162 (74)	
812	5,166 (7000)	48.0 (35.8)	525	850	3,000	1,500	850	675	525	FSO-800	C812	146 (66)	
814	9,667 (13100)	90.0 (67.1)	525	850	2,800	1,500	850	675	525	FSO-800	C814	181 (82)	
916	18,000 (24480)	250 (186)	500	700	2,000	1,350	700	650	500	FSO-900	C916	512 (233)	
1018	27,000 (36720)	370 (276)	375	500	2,000	1,100	500	475	375	FSO-1027	C1018	619 (281)	

\* For clutch dimensions and bore/keyseat sizes, see pages 15 and 17.

† Labyrinth grease seals permit higher inner race overrunning speed; see pages 14 and 16.

## FWW

### Specifications

FWW Size	Torque Capacity lb.ft. (Nm)	HP Rating/ 100 RPM HP (kw)	Maximum RPM Overrunning Speed								Clutch Size*	Coupling Size	Shipping Weight lb. (kg)
			Standard Sprag			C/T Sprag							
			Outer Race	Inner <sup>†</sup> Race	Drive Speed	Outer Race	Inner Race	Sprag Lift-off	Drive Speed				
420	276 (375)	5.2 (3.8)	850	2,800	6,200	5,000	2,800	1,300	1,100	FSO-400	C420	20 (9)	
530	885 (1200)	16.8 (12.5)	800	2,500	5,000	4,000	2,500	1,200	1,000	FSO-500	C530	42 (19)	
640	2,066 (2800)	39.3 (29.3)	750	2,200	3,750	3,600	2,200	1,200	1,000	FSO-600	C640	91 (41)	
745	5,000 (6800)	95.2 (71)	450	1,600	3,000	2,500	1,600	1,000	800	FSO-700	C745	150 (68)	
755	7,000 (9520)	133.2 (99)	650	1,000	2,800	1,800	1,000	800	650	FSO-750	C755	323 (147)	

\* For clutch dimensions and bore/keyseat sizes, see pages 15 and 17.

† Labyrinth grease seals permit higher inner race overrunning speeds, see pages 14 and 16.

### Coupling Bore Sizes

Coupling Size	Bore Range	
	Min.	Max.
C403	0.63 (15.9)	1.25 (31.8)
C406	0.84 (21.4)	1.63 (41.3)
C504	0.84 (21.4)	1.63 (41.3)
C508	1.13 (28.6)	2.37 (60.3)
C607	0.93 (23.5)	2.25 (57.1)
C610	1.50 (38.1)	3.74 (95.0)
C708	1.50 (38.1)	3.18 (80.7)
C712	1.81 (46.1)	3.74 (95.0)
C752	1.81 (46.1)	3.74 (95.0)
C754	2.19 (55.6)	4.44 (112.9)
C812	1.81 (46.1)	3.74 (95.0)
C814	2.19 (55.6)	4.44 (112.9)
C916	2.50 (63.5)	7.02 (178.2)
C1018	2.50 (63.5)	7.02 (178.2)
C420	0.84 (21.4)	1.63 (41.3)
C530	1.13 (28.6)	2.37 (60.3)
C640	1.50 (38.1)	3.18 (80.7)
C745	1.82 (46.2)	3.74 (95.0)
C755	2.19 (55.6)	4.44 (112.9)

### Bore sizes and keyseats inches (mm)

Size	Bore Size	Keyseat	Bore Range	
			Min.	Max.
300	.500 (12.70)	1/8 x 1/16 (3.18 x 1.57)	.500 (12.70)	.750 (19.05)
	.625 (15.87)	3/16 x 3/32 (4.75 x 2.36)		
	15mm	5 x 2.3mm***		
	.750 (19.05)	3/16 x 3/32 (4.75 x 2.36)		
	.500 (12.70)	1/8 x 1/16 (3.18 x 1.57)		
400	.625 (15.87)	3/16 x 3/32 (4.75 x 2.36)	.437 (11.10)	.875 (22.22)
	18 mm	6 x 2.8mm***		
	.750 (19.05)	3/16 x 3/32 (4.75 x 2.36)		
	.875 (22.22)	3/16 x 1/16 (4.75 x 1.57)		
	.875 (22.22)	3/16 x 3/32 (4.75 x 2.36)		
500	1.000 (25.40)	1/4 x 1/8 (6.35 x 3.18)	.750 (19.05)	1.312 (33.32)
	1.125 (28.57)	1/4 x 1/8 (6.35 x 3.18)		
	30mm	10 x 3.3mm***		
	1.250 (31.75)	1/4 x 1/8 (6.35 x 3.18)		
	1.312 (33.32)	1/4 x 3/32 (6.35 x 2.29)		
550	1.250 (31.75)	1/4 x 1/8 (6.35 x 3.18)	1.00 (25.40)	1.625 (41.27)
	1.312 (33.32)	3/8 x 3/16 (9.52 x 4.75)		
	1.5000 (38.10)	3/8 x 3/16 (9.52 x 4.75)		
	1.625 (41.27)	3/8 x 1/8 (9.52 x 3.18)		
	1.250 (31.75)	1/4 x 1/8 (6.35 x 3.18)		
600	1.375 (34.92)	3/8 x 3/16 (9.52 x 4.75)	.937 (23.80)	2.250*† (57.15)
	1.5000 (38.10)	3/8 x 3/16 (9.52 x 4.75)		
	40mm	12 x 3.3mm***		
	1.625 (41.27)	3/8 x 3/16 (9.52 x 4.75)		
	1.750 (44.45)	3/8 x 3/16 (9.52 x 4.75)		
650	45mm	14 x 3.8mm***	1.69 (42.85)	2.500 (63.5)
	50mm	14 x 3.8mm***		
	2.000 (50.80)	3/8 x 1/8 (9.52 x 3.18)		
	1.937 (49.20)	1/2 x 1/4 (12.70 x 6.35)		
	2.000 (50.80)	1/2 x 1/4 (12.70 x 6.35)		
700	2.250 (57.15)	1/2 x 1/4 (12.70 x 6.35)	1.875 (47.62)	3.250*† (82.55)
	2.437 (61.90)	5/8 x 5/16 (15.87 x 7.93)		
	2.500 (63.50)	5/8 x 5/16 (15.87 x 7.93)		
	65mm	18 x 4.4mm***		
	2.750 (69.85)	5/8 x 7/32 (15.87 x 5.53)		
750	70mm	20 x 4.9mm***	1.875 (47.62)	3.250*† (82.55)
	2.937 (74.60)	5/8 x 1/8 (15.87 x 3.18)		
	75mm	20 x 4.9mm***		
	80mm	22 x 5.4mm***		
	1.937 (49.20)	1/2 x 1/4 (12.70 x 6.35)		

### Bore sizes and keyseats†† inches (mm)

Size	Bore Size	Keyseat	Bore Range	
			Min.	Max.
750	2.437 (61.90)	5/8 x 5/16 (15.87 x 7.94)	2.250 (57.15)	3.437 (87.30)
	2.500 (63.50)	5/8 x 5/16 (15.87 x 7.94)		
	65mm	18 x 4.4mm***		
	2.750 (69.85)	5/8 x 5/16 (15.87 x 7.94)		
	70mm	20 x 4.9mm***		
800	2.937 (74.60)	3/4 x 3/8 (19.05 x 9.52)	2.625 (66.67)	4.437 (112.70)
	75mm	20 x 4.9mm***		
	3.000 (76.20)	3/4 x 3/8 (19.05 x 9.52)		
	80mm	22 x 5.4mm***		
	3.250 (82.55)	3/4 x 1/4 (19.05 x 6.35)		
850	3.437 (87.30)	3/4 x 3/16 (19.05 x 4.75)	2.625 (66.67)	4.437 (112.70)
	3.000 (76.20)	3/4 x 3/8 (19.05 x 9.52)		
	80mm	22 x 5.4mm***		
	3.250 (82.55)	3/4 x 3/8 (19.05 x 9.52)		
	85mm	22 x 5.4mmv***		
900	3.437 (87.30)	7/8 x 7/16 (22.23 x 11.11)	3.625 (92.07)	5.437 (138.10)
	3.500 (88.90)	7/8 x 7/16 (22.23 x 11.11)		
	90mm	25 x 5.4mm***		
	3.750 (95.25)	7/8 x 7/16 (22.23 x 11.11)		
	100mm	28 x 6.4mm***		
950	3.937 (100.00)	1 x 1/2 (25.40 x 12.70)	3.625 (92.07)	5.437 (138.10)
	4.000 (101.60)	1 x 1/2 (25.40 x 12.70)		
	4.250 (107.95)	1 x 3/8 (25.40 x 9.52)		
	110mm	28 x 6.4mm***		
	4.437 (112.70)	1 x 1/4 (25.40 x 6.35)		
1000	4.000 (101.60)	1 x 1/2 (25.40 x 12.70)	3.625 (92.07)	5.437 (138.10)
	4.250 (107.95)	1 x 1/2 (25.40 x 12.70)		
	110mm	28 x 6.4mm***		
	4.437 (112.70)	1 x 1/2 (25.40 x 12.70)		
	4.500 (114.30)	1 x 1/2 (25.40 x 12.70)		
1027	4.937 (125.40)	1 1/4 x 5/8 (31.75 x 15.87)	4.937 (125.40)	7.000 (177.80)
	130mm	36 x 8.4mm***		
	150mm	45 x 10.4mm***		
	6.000 (152.40)	1 1/4 x 5/8 (31.75 x 15.87)		
	6.250 (158.75)	1 1/2 x 1/2 (38.10 x 12.70)		
1077	6.625 (168.27)	1 1/2 x 1/2 (38.10 x 12.70)	4.937 (125.40)	7.000 (177.80)
	6.750 (171.45)	1 1/2 x 1/2 (38.10 x 12.70)		
	6.875 (174.62)	1 1/2 x 1/2 (38.10 x 12.70)		
	175mm	45 x 10.4mm***		
	7.000 (177.80)	1 1/2 x 7/16 (38.10 x 11.10)		

\* 1/2 x 1/8 keyway.

\*\* 3/4 x 1/4 keyway.

\*\*\* Contact Formsprag for keyseat information.

† The "E" dimension is larger for this bore size.


†† For finished dimensions of keys supplied with the clutch, contact Formsprag.

# Clutch Couplings


## FW/FWW



MEX (55) 53 63 23 31 MTY (81) 83 54 10 18  
 QRO (442) 1 95 72 60 ventas@industrialmagza.com

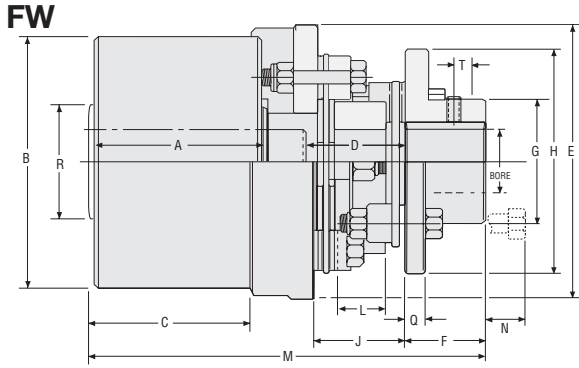

Coupling sizes 403 through 712 have PCE sprags. C/T sprags are available for all sizes.

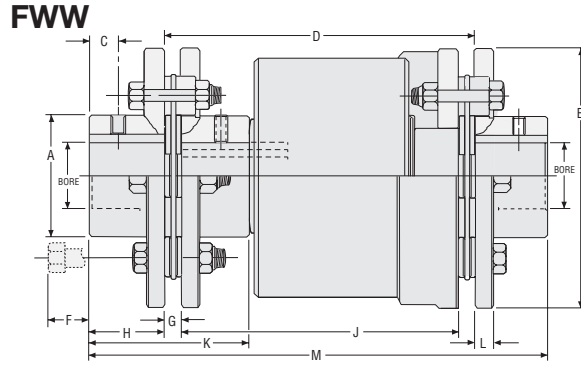

Coupling sizes 420 through 745 have PCE sprags. C/T sprags are available for all sizes.

### FW

Dimensions inches (mm)

Size	A	B	C	D	E	F	G	H	J	L	M	N	Q	R	T
403	2.75 (69.85)	3.500/3.498 (88.90/88.85)	2.53 (64.26)	2.39/1.72 (60.71/43.69)	4.00 (101.60)	1.00 (25.40)	1.80 (45.72)	3.19 (81.03)	1.72 (43.69)	1.18 (29.97)	6.167 (156.64)	0.62 (15.75)	0.30 (7.62)	1.187 (30.15)	.375 (9.53)
406	2.75 (69.85)	3.500/3.498 (88.90/88.85)	2.53 (64.26)	2.67/1.74 (67.82/44.20)	4.08 (103.63)	1.32 (33.53)	2.40 (60.96)	4.08 (103.63)	1.74 (44.20)	1.06 (26.92)	6.740 (171.20)	0.87 (22.10)	0.35 (8.89)	1.187 (30.15)	.500 (12.70)
504	3.50 (88.90)	4.250/4.248 (107.95/107.90)	3.25 (82.55)	2.64/1.74 (67.06/44.20)	4.75 (120.65)	1.32 (33.53)	2.40 (60.96)	4.08 (103.63)	1.74 (44.20)	1.06 (26.92)	7.460 (189.48)	0.87 (22.10)	0.35 (8.89)	1.750 (44.45)	.500 (12.70)
508	3.50 (88.90)	4.250/4.248 (107.95/107.90)	3.25 (82.55)	3.70/2.48 (93.98/62.99)	5.63 (143.00)	1.88 (47.75)	3.30 (83.82)	5.51 (139.95)	2.48 (62.99)	1.54 (39.12)	9.085 (230.76)	1.25 (31.75)	0.55 (13.97)	1.750 (44.45)	.687 (17.45)
607	3.75 (95.25)	5.375/5.373 (136.53/136.47)	3.50 (88.90)	3.30/2.63 (83.82/66.80)	5.86 (148.84)	1.62 (41.15)	3.14 (79.76)	4.80 (121.92)	2.63 (66.80)	1.85 (46.99)	8.25 (209.55)	1.00 (25.40)	0.35 (8.89)	2.750 (69.85)	.625 (15.88)
610	3.75 (95.25)	5.375/5.373 (136.53/136.47)	3.50 (88.90)	5.35/4.17 (135.89/105.92)	7.79 (197.87)	3.00 (76.20)	5.23 (132.84)	7.79 (197.87)	4.17 (105.92)	3.08 (78.23)	11.25 (285.75)	1.30 (33.02)	0.55 (13.97)	2.750 (69.85)	1.20 (30.48)
708	5.00 (127.00)	7.125/7.123 (180.98/180.92)	4.94 (125.48)	4.60/3.58 (116.84/90.93)	7.12 (180.85)	2.25 (57.15)	4.44 (112.78)	5.70 (144.78)	3.58 (90.93)	2.64 (67.06)	11.70 (297.18)	1.00 (25.40)	0.45 (11.43)	4.000 (101.60)	.875 (22.23)
712	5.00 (127.00)	7.125/7.123 (180.98/180.92)	4.94 (125.48)	4.69/3.26 (119.13/82.80)	7.79 (197.87)	3.00 (76.20)	5.23 (132.84)	7.79 (197.87)	4.17 (105.92)	3.08 (78.23)	13.19 (335.03)	1.30 (33.02)	0.55 (13.97)	4.000 (101.60)	1.203 (30.56)
752	6.00 (152.40)	8.750/8.748 (222.25/222.20)	5.94 (150.88)	4.69/3.26 (119.13/82.80)	8.75 (222.25)	3.00 (76.20)	5.23 (132.84)	7.79 (197.87)	4.17 (105.92)	3.08 (78.23)	13.31 (338.07)	1.30 (33.02)	0.55 (13.97)	4.250 (107.95)	1.203 (30.56)
754	6.00 (152.40)	8.750/8.748 (222.25/222.20)	5.94 (150.88)	6.58/4.45 (167.13/113.03)	9.21 (233.93)	4.00 (101.60)	6.22 (157.99)	9.21 (233.93)	4.92 (124.97)	3.51 (89.15)	16.10 (408.94)	1.75 (44.45)	.66 (16.76)	4.250 (107.95)	1.562 (39.67)
812	6.00 (152.40)	10.000/9.998 (254.00/253.95)	5.94 (150.88)	4.69/3.26 (119.13/82.80)	10.00 (254.00)	3.00 (76.20)	5.23 (132.84)	7.79 (197.87)	4.17 (105.92)	3.08 (78.23)	13.31 (338.07)	1.30 (33.02)	.55 (13.97)	5.500 (139.70)	1.203 (30.56)
814	6.00 (152.40)	10.000/9.998 (254.00/253.95)	5.94 (150.88)	6.58/4.45 (167.13/113.03)	10.00 (254.00)	4.00 (101.60)	6.22 (157.99)	9.21 (233.93)	4.92 (124.97)	3.51 (89.15)	16.16 (410.46)	1.75 (44.45)	.66 (16.76)	5.500 (139.70)	1.562 (39.67)
916	6.38 (162.05)	12.000/11.997 (304.80/304.72)	6.06 (153.92)	9.05/6.78 (229.87/172.21)	12.50 (317.50)	6.00 (152.40)	9.80 (248.92)	14.10 (358.14)	7.87 (199.90)	6.30 (160.02)	21.60 (548.64)	1.30 (33.02)	.80 (20.32)	6.380 (162.05)	2.500 (63.50)
1018	6.63 (168.40)	15.000/14.997 (381.00/380.92)	6.56 (166.62)	9.05/6.78 (229.87/172.21)	15.50 (393.70)	6.00 (152.40)	9.80 (248.92)	14.10 (358.14)	7.87 (199.90)	6.30 (160.02)	21.80 (553.72)	1.30 (33.02)	.80 (20.32)	9.000 (228.60)	2.500 (63.50)

### FWW


Dimensions inches (mm)

Size	A	B	C	D	F	G	H	J	K	L	M
420	2.40 (60.96)	4.08 (103.63)	0.50 (12.70)	5.68 (144.27)	0.87 (22.10)	0.34 (8.64)	1.32 (33.53)	5.00 (127.00)	2.98 (75.69)	0.35 (8.89)	8.32 (211.33)
530	3.30 (83.82)	5.51 (139.95)	0.69 (17.53)	7.70 (195.58)	1.25 (31.75)	0.55 (13.97)	1.88 (47.75)	6.61 (167.89)	4.23 (107.44)	0.55 (13.97)	11.46 (291.08)
640	5.66 (143.76)	6.65 (168.91)	0.87 (22.10)	7.92 (201.17)	1.00 (25.40)	0.45 (11.43)	2.24 (56.90)	7.01 (178.05)	5.60 (142.24)	0.35 (8.89)	12.42 (315.47)
745	6.50 (165.10)	7.79 (197.87)	1.20 (30.48)	10.26 (260.60)	1.30 (33.02)	0.55 (13.97)	3.00 (76.20)	9.16 (232.66)	6.85 (173.99)	0.45 (11.43)	16.26 (413.00)
755	7.83 (198.88)	9.21 (233.93)	1.56 (39.62)	12.70 (322.58)	1.75 (44.45)	0.66 (16.76)	4.00 (101.60)	11.37 (288.80)	9.07 (230.38)	0.55 (13.97)	20.71 (526.03)

## Selection Procedure

- Calculate the drive torque to be transmitted by the clutch coupling:  

$$\text{Drive Torque (lbs.-ft.)} = \frac{5250 \times \text{HP}}{\text{RPM}}$$
- Select proper Service Factor from the table below.
- Determine Design Torque:  
 Design Torque (lbs.-ft.) = Service Factor x Drive Torque.
- Determine shaft size and bore requirements of clutch and coupling. Check key and shaft stress before making final selection since this may determine maximum allowable drive torque capacity. Metric bore and keyseats available on request.
- Determine overrunning speed and the type of clutch coupling required (FW or FWW). Standard FW and FWW Clutch Couplings (Form-Flex coupling combined with a FSO clutch) are designed for high speed inner race overrunning and intermediate speed outer race overrunning.
  - FW C/T or FWW C/T models may be used in applications where the drive RPM is lower than the listed C/T maximum drive RPM and the outer race overrunning RPM is higher than the listed lift off RPM.
  - FW C/T or FWW C/T models may not be used in applications where the drive RPM is higher than the listed maximum drive RPM.
- Determine the direction of rotation required. These units are not symmetrical, rotational direction must be specified.
- Select a clutch coupling from the catalog based on Design Torque, Bore Size and overrunning speed to meet the application requirements.
- Check the maximum drive speed rating of the clutch coupling selected. If the application speed requirement is greater than the maximum drive speed rating consult Formsprag.
- Check space limitations to allow axial space for assembly and disassembly of clutch coupling.
- Do not exceed angular or parallel alignment shown on page 110.
- Check lubrication requirements (refer to page 126). Grease is not recommended where ambient temperatures are below +20°F.

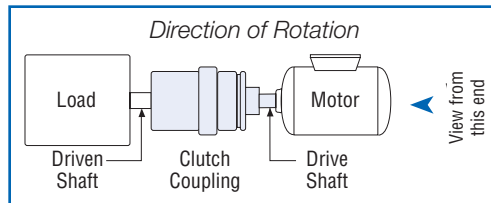

## Service Factors

### Formsprag Overrunning Clutch

Couplings are suitable for many different power transmission applications. Please refer to this table for proper service factor for your application.

Typical Prime movers are listed below, types of loads across the top, and your service factor opposite the typical prime movers.

		Driven Equipment Load Classifications			
		Light Steady Loads Starting torque is equal to or slightly greater than running torque.	Moderate Loads High starting torque or above average running torque.	Medium Loads Starting torque is approximately double running torque.	Heavy-Duty Loads High starting torque, shock loading, light torque reversals during drive.
		Centrifugal pumps, uniformly loaded conveyors, light-duty fans and blowers, liquid mixers and agitators, centrifugal compressors, lobe and vane type blowers, gear pumps, textile machinery, wood-working machinery.	Hot oil pumps, heavy-duty centrifugal pumps, cooling towers, slurry agitators, boiler feed pumps, hoists, conveyors.	Dredge pumps, dynamometer drives, light-duty hammermills, lineshafts, paper-converting machinery, rotary kilns, rotary or screw-type pumps for high viscosity fluids.	Mine ventilating fans, reciprocating pumps or compressors, papermaking machinery, heavy-duty hammermills, ore crushers, pulverizing mills.
Prime Mover	Steam, gas or air turbine	1.00	1.50	1.50	2.50
	AC electric motor	1.25	1.50	1.50	2.50
	DC electric motor with DOL start AC electric motor	1.25	1.50	1.75	3.00
	Gasoline, natural gas, propane or other spark ignition engine	1.75	1.75	Consult Formsprag	Consult Formsprag
	Diesel	Consult Formsprag	Consult Formsprag	Consult Formsprag	Consult Formsprag

DOL = Direct on Line

## Installation and Alignment Procedure


### Mounting and Preliminary Alignment

Reasonable care in initial assembly and aligning will permit clutch-coupling to operate to full capacity, compensate for misalignment, and provide long service life.

1. Inspect shafts and bores and make sure they are free from burrs. Check for the proper fit of the keys to the shafts and bores.
2. Position the coupling hub so that the shaft end is flush with the machined face of the flange. Coupling hub shrink fits are not necessary with Form-Flex couplings. If the hub is bored for an interference fit, the hubs should be heated in oil at 200–250°F and then quickly positioned on the shaft. Do not spot heat as it may cause distortion.
3. Check clutch for proper rotation by overrunning (freewheeling) clutch by hand. Mount clutch and key on shaft. Mount so that clutch will stay in place in service. Use shoulders, snap rings, set collars, or locking keys. Fit the clutch/adaptor assembly so that A) the machined face of the adapter is flush with the proper shaft end or B) the dimension as specified on the installation drawing between the shaft end and the machined face of the adapter is maintained.
4. Move the equipment to be connected into position. Set the gap between hub and adapter flanges to the “Adapter to Coupling Flange Dimension” within  $\pm .010$ ". For special clutch couplings, refer to the installation drawing for the proper dimension.


### Angular Alignment

5. After preliminary alignment, secure a dial indicator to the adapter flange and indicate face of the coupling hub as shown in figures 1 and 2.
6. Rotate the adapter flange to which the indicator is attached to find minimum indicator reading. Set the indicator for zero reading.
7. Again, rotate the coupling half (with indicator attached) 360° to check misalignment.




FW

Figure 1. Angular alignment.




FW

Figure 3. Parallel alignment.

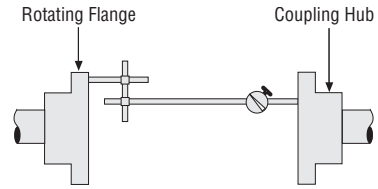

FWW

Figure 2. Angular alignment.

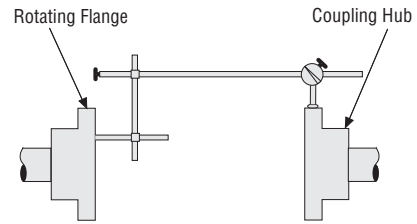

FWW

Figure 4. Parallel alignment.

Coupling Model No.	T.I.R.	
	Angular	Parallel
403	.028	.006
406	.036	.006
420	.036	.012
504	.036	.006
508	.048	.008
530	.048	.029
607	.042	.009
610	.068	.015
640	.058	.030
708	.050	.012
712	.068	.015
728	.052	.004
732	.066	.005
745	.068	.039
752	.068	.015
754	.080	.017
755	.080	.048
812	.068	.015
814	.080	.017
916	.062	.029
1018	.062	.029

\* Bolts should be lubricated with grease before assembling.

8. Adjust position of connected equipment until indicator reading is within the allowable variation shown in the table at right.

### Parallel Alignment

9. Reposition the indicator as shown in figure 3 and/or figure 4 and check for parallel alignment. Adjust the height of connected equipment to attain minimum misalignment. The allowable parallel misalignment is indicated in the table above.
10. Recheck angular alignment to make certain the values in the table have not been exceeded.

### Coupling Assembly


11. Assemble the clutch coupling.

**Note:** The curved face of the washers must be placed adjacent to the flexible element pack. Do not drive or force bolts into position. The thick washers nest in the large clearance holes in the flanges.


12. Torque tighten all nuts to the value shown below. Check torque on nuts after several hours of actual running. Use “Loctite” on bolts which fasten into tapped holes.

For further information write for installation and Maintenance Bulletin WRN 2332.

**FW**

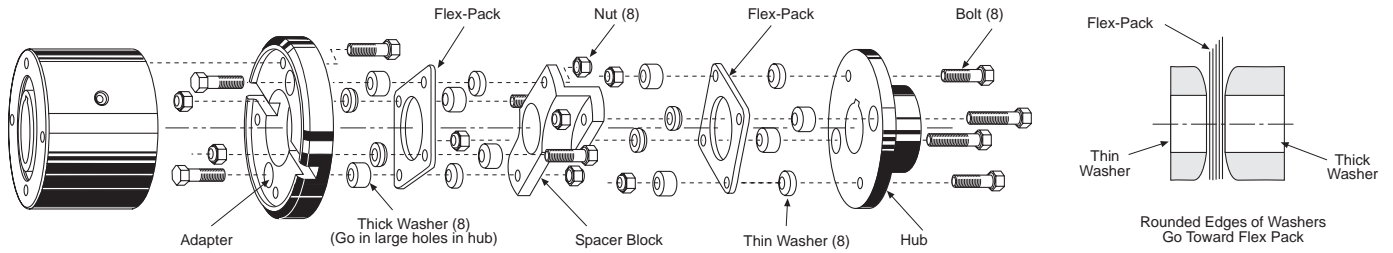

**FWW**

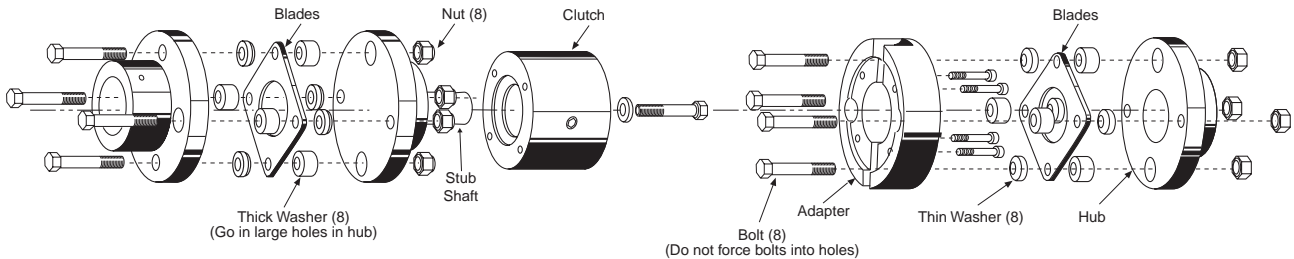

**Torque Values (mm)**

Coupling Model No.	Tightening Torque lb.ft. (Nm.)*
403	8 (10.5)
406	19 (26)
420	19 (26)
504	19 (26)
508	66 (90)
530	66 (90)
607	37 (50)
610	236 (320)
640	110 (150)
708	110 (150)
712	236 (320)
728	58 (78.636)
732	115 (155.917)
745	115 (155.917)
752	236 (320)
754	465 (630)
755	465 (630)
812	236 (320)
814	465 (630)
916	553 (750)
1018	553 (750)

\* Bolts should be lubricated with grease before assembling.

**How to Order**


**Available Modifications**

Special designs are available. Contact Formsprag Engineering.

- Custom length spacers to accommodate greater distance between shafts.
- Dynamic balancing for high speed applications
- Splined bore for splined shafts.
- Taperlock and Q.D. bushings for the coupling hub.
- Tapered bore coupling hubs for mill motors.
- Holding brake to provide overrunning drag when required for turbine or motor dual drive systems.

**Example**

When the assembly number is known, please specify:

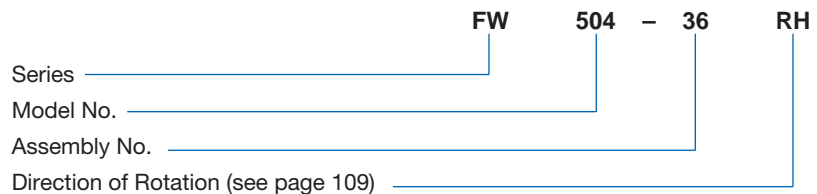

When the assembly number is not known, please specify:

Item	Example
Series and Model No. ....	FW-752
Clutch Bore (Driven or Driving) .....	Clutch 2.50" Driven Shaft
Keyseat Size (If other than listed on page 15)	
Coupling Bore (Driven or Driving) .....	Coupling 2.75" Driving Shaft
Keyseat Size (If other than listed on page 107)	
Direction of Rotation (see page 109) .....	Rotation RH
Lubricant, Oil/GR (Grease) .....	GR
Labyrinth seal optional .....	L