



POWERTORK®


Series "F" Mill Motor Flange Type Gear Coupling.

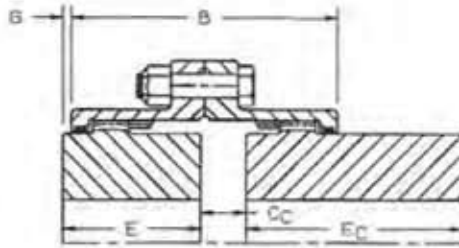

Full Flex Mill Motor Coupling
With Rough Bored Composite Hub

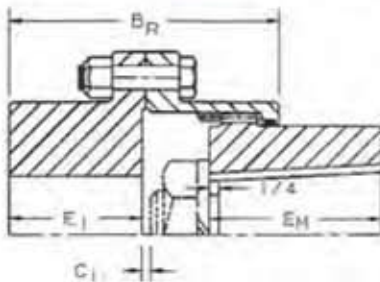

Flex Rigid Mill Motor Coupling
For AISE Mill Motors

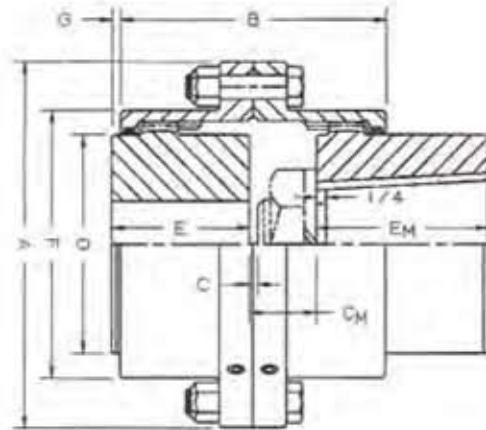

Full Flex Mill Motor Coupling
For AISE Mill Motors

Series F	Size	1½	2	2½	3	3½	4	4½	5	5½	6
A		6.00	7.00	8.38	9.44	11.00	12.50	13.63	15.31	16.75	18.00
B		3.88	4.84	6.00	6.94	8.38	9.34	10.50	11.81	13.13	13.31
BR		3.85	4.80	6.00	6.97	8.25	9.30	10.44	11.78	12.94	14.31
C		.13	.13	.19	.19	.25	.25	.31	.31	.31	.31
CC		.75	1.06	1.13	1.19	1.38	1.56	1.63	1.63	1.63	1.63
C1		.16	.16	.19	.19	.22	.31	.34	.34	.41	.41
E		1.94	2.44	3.03	3.59	4.19	4.75	5.31	6.03	6.63	7.41
EC		3.50	4.00	5.16	5.63	6.13	6.00	7.19	8.31	10.31	10.31
E1		1.84	2.28	2.91	3.41	3.97	4.44	5.00	5.69	6.05	7.41
F		3.91	4.88	5.91	6.88	7.91	9.25	10.31	11.56	12.59	13.88
G		.06	.06	.13	.22	.13	.20	.22	.28	.22	.91
NC		.88	.97	1.44	1.81	2.25	2.55	3.22	3.66	4.25	4.28
O		3.05	3.97	4.88	5.63	6.50	7.75	8.50	9.50	10.50	11.63
Rough Stock Bore		-	-	-	-	-	2.25	2.25	3.00	3.00	3.00

Notes:

- (1) All keyways parallel to the taper bore.
- (2) All tapers are 1-1/4" per foot on diameter.
- (3) Sizes 5½ and 6 not available in shrouded bolt.
- (4) All ratings are the same as the standard series F couplings found on Data Sheet DS100.
- (5) For dimensions CM and DM, see reverse side of data sheet.



MAGZA
DIST. AUTORIZADO

MEX (55) 53 63 23 31 MTY (81) 83 54 10 18
QRO (442) 1 95 72 60 ventas@industrialmagza.co